

Digital Age Networking


For more information, visit:
www.al-enterprise.com

OmniAccess® Stellar

Wi-Fi 7 Indoor OmniAccess Stellar 1521

Indoor mid-range Wi-Fi 7 access point

- 12.2 Gbps • 1536 clients • 36 SSID
- 6 GHz 2x2:2, 5 GHz 4x4:4 and 2.4 GHz 2x2:2
- USB-C • Scanning radio • USB 2.0
- 1x10GbE + 1x1GbE • MLO • 320MHz
- 4K-QAM • DL and UL MU-MIMO
- WPA3 • Temp: 0°C to 50°C
- BLE/Zigbee Integrated • TPM 2.0
- PoE powered 802.3at/bt
- Retrocompatible with previous standards




[Click for more details](#)

Wi-Fi 6E Indoor OmniAccess Stellar 1451

Indoor high-end premium Wi-Fi 6E access point for increasing IoT needs

- 10 Gbps • 1536 clients • 48 SSID
- Tri Radio 2.4GHz 4x4, 5GHz 8x8 & 6GHz 4x4
- Scanning radio • USB 3.0 • 10GE+10GE
- DL and UL MU-MIMO • WPA3
- Target Wake Time • Temp: 0°C to 45°C
- Max power: 49W
- Retrocompatible with previous standards
- PoE powered 802.3bt • BLE/Zigbee integrated




[Click for more details](#)

Wi-Fi 6E Indoor OmniAccess Stellar 1431

Indoor premium Wi-Fi 6E access point that provides high-efficiency and high-performance for high client density environments.

- 4.2 Gbps • 512 clients • 16 SSID
- Tri Radio, 6 GHz 2x2:2, 5 GHz 2x2:2 and 2.4 GHz 2x2:2
- Max power: 34W • USB 3.0 • 2.5GE + 2.5GE
- DL and UL MU-MIMO • WPA3
- Target Wake Time Temp: 0°C to 45°C
- Target Wake Time
- Temp: 40°C to 65°C
- Retrocompatible with previous standards
- Max power: 70W
- PoE powered 802.3bt/at • BLE/Zigbee integrated




[Click for more details](#)

Wi-Fi 6 Outdoor OmniAccess Stellar 1351

Ruggedized Wi-Fi 6 access point for outdoor high-density environments

- 10 Gbps • 1536 clients • 24 SSID • 1200 g
- DPI • WPA3 • Tri radio 2.4GHz and Dual 5GHz
- 2.23 Kg • DPI • IP67 rated
- 4 radios - 1 dedicated to scanning
- DL and UL MU-MIMO • Target Wake Time
- Temp: 0°C to 45°C • Max power: 60W
- Target Wake Time
- Temp: 40°C to 65°C
- Retrocompatible with previous standards
- PoE powered 802.3bt • BLE/Zigbee integrated



[Click for more details](#)

Wi-Fi 6 Indoor OmniAccess Stellar 1320

Wi-Fi 6 access point for indoor high-density environments

- 3 Gbps • 1024 clients • 32 SSID
- 700 g • DPI • Dual radio • WPA3
- 2.23 Kg • DPI • IP67 rated
- 4 radios - 1 dedicated to scanning
- DL and UL MU-MIMO • Target Wake Time
- Temp: 0°C to 50°C
- Target Wake Time
- Temp: 0°C to 45°C • Max power: 60W
- Retrocompatible with previous standards
- PoE powered 802.3at/bt • BLE/Zigbee integrated



[Click for more details](#)

Wi-Fi 6 Indoor OmniAccess Stellar 1301

Wi-Fi 6 access point, basic entry-level for indoor; ideal for small and medium enterprises

- 3 Gbps • 512 clients • 16 SSID
- 574 g • DPI • Dual radio • WPA3
- DL and UL MU-MIMO
- Target Wake Time • Temp: 0°C to 45°C
- Target Wake Time
- Temp: 0°C to 50°C
- Retrocompatible with previous standards
- Max power: 13.1 W
- PoE powered 802.3/at



[Click for more details](#)

Wi-Fi 6 Indoor OmniAccess Stellar 1301H

Wi-Fi 6 indoor designed for vertical industries and teleworkers

- 3.55 Gbps • 1024 clients • 32 SSID • TWT
- 985 g • DPI • Dual Radio DL & UL MU-MIMO
- 3.6 Gbps • 512 clients • 16 SSID
- 1.77 Gbps • 1024 clients • 32 SSID
- 320 g • DPI • Dual Radio • WPA3
- DL & UL MU-MIMO • TWT
- Temp: 0°C to 45°C
- Max power: 12.7 W
- PoE powered 802.3at/bt
- BLE/Zigbee integrated
- 802.3af/at • BLE integrated



[Click for more details](#)

Distributed Wi-Fi Control Architecture

Alcatel-Lucent Enterprise OmniAccess Stellar products embed WLAN control in access points (APs) and eliminating the need for physical centralised controllers.

ALE smart and advanced APs are managed as a single system or cluster, in a distributed and coordinated manner. Distributed architecture from ALE delivers the best performance and scalability, and ensures high availability, with operational simplicity and low Total Cost of Ownership (TCO).

- Integrated WLAN controller
- Coordinated intelligence
- Lower CAPEX & OPEX
- Improved resiliency
- No traffic bottleneck and decreased latency
- Better scalability

OmniSwitch®

Premium access OmniSwitch 6870

Advanced 24/48 ports 1G/Multi-gig and 25G switches for campus and Data Center networking

- 802.3bt PoE up to 95W per port and 3.3 kW PoE budget • Flexible PSU Load-Sharing PoE
- PoE and non-PoE models can stack together • Various uplink speed up to 200G
- OmniFabric ready • 256-bit MACsec on all ports • Telemetry • SPB • VxLAN
- Virtual chassis • QoS • IPv4/v6 • VRF • Advanced routing • Multicast • UNP



[Click for more details](#)

Premium access OmniSwitch 6860N

Advanced 24/48 ports 1G/Multigig switch for campus and Data Center networking

- PoE+ and non-PoE models • Up to 95W PoE and 3.4 kW PoE budget
- 802.3bt PoE up to 95W per port and 3.3 kW PoE budget • Flexible PSU Load-Sharing PoE
- PoE and non-PoE models can stack together • Various uplink speed up to 200G
- OmniFabric ready • 256-bit MACsec on all ports • Telemetry • SPB • VxLAN
- Virtual chassis • QoS • IPv4/v6 • VRF • Advanced routing • Multicast • UNP



[Click for more details](#)

Advanced access OmniSwitch 6570M

Advanced 12/28 ports 1G/10G switch for Enterprise and Service Provider Networks

- PoE+ and non-PoE models • Up to 95W PoE and 3.4 kW PoE budget
- Metro Ethernet Services enabled • Virtual chassis
- Automatic VLAN • Advanced QoS • IPv4/v6
- Context-based QoS • JTC • IPv4/v6 • FIPs • VRF • Advanced routing
- Multicast • EAL-2/NDCPP • UNP • Smart analytics
- Application analytics • MACsec encryption



[Click for more details](#)

Advanced access OmniSwitch 6560/E

Cost-effective Layer 3 24/48 ports Multigig access switch for large IoT-based and Wi-Fi 6/7 networks

- 802.3bt PoE • PoE+ and non-PoE models • 10G SFP+ uplinks
- Fiber SFP+ ports • Modular load-sharing power supplies • Up to 95W/port
- Static IPv4/v6 routing • UNP • Fiber SFP Ports
- IoT profiling enablement • Advanced QoS • IPv4/v6 • Static/Dynamic routing
- EAL-2/NDCPP • CE 3.0 certified
- MACsec encryption



[Click for more details](#)

Value access OmniSwitch 6360

Advanced Layer 2/10/24/48 ports 1Gb for classroom, campus and small/branch enterprise

- PoE+ and non-PoE models • 10G SFP+ uplinks
- Static IPv4/v6 routing • UNP • Fiber SFP Ports
- IoT enablement • Fanless (10/24 ports) • Virtual Chassis
- Perpetual/Fast PoE • Multigig/HPOE on P48X model
- Virtual chassis



[Click for more details](#)

Ruggedized OmniSwitch 6865

Advanced Layer 3 fanless Ethernet switches designed to operate in the harshest industrial environments

- PoE+ and non-PoE models • SFP+ uplinks • SPB Virtual chassis
- Temp: -40° C to 75° C • EAL-2/NDCPP • Advanced stacking and routing
- VRF • Multicast • IPv4/v6 • JTIC • UNP • Automatic VLAN
- Advanced L3 • Fast • Perpetual • High surge tolerance • 802.3bt PoE
- HPOE up to 75W/port • IoT enablement • FIPS 140-2 • Ifab
- Certified for: DNV MIL Railway Electric substation TAA NEMA-TS2



[Click for more details](#)

Ruggedized and high-temperature OmniSwitch 6465/6465T

Compact hardened fanless 6/12/28 ports Gigabit Ethernet switches for industrial applications

- PoE+ and non-PoE models • 802.3bt PoE
- HPOE up to 60W/port • Instant/continuous PoE
- Network automation • Virtual chassis • High surge tolerance
- DIN mountable • MACsec encryption • Zero touch provisioning
- IoT enablement • Support IEEE 1588v2 PTP • Disaster recovery
- Extended temperature ruggedized




[More details on 6465](#) [More details on 6465T](#)

Modular core switch OmniSwitch 9900

High-density chassis for core campus and Data Center networks

- 7 Slot modular chassis • 25.6 Tb/s aggregated switching capacity (with two OS9907-CFM2) • Up to 10,800W of PoE budget
- Virtual chassis • VRF • Advanced routing • MACsec
- Multicast • IPv4/v6 • FIPs 140-2 Core network and DC Fabric at 1G/10G/25G/40G/100G
- Programmability: Python, RESTful API, OpenStack, Python, Rest API, SSH
- EAL-2/NDCPP • JTIC • SPB • UNP

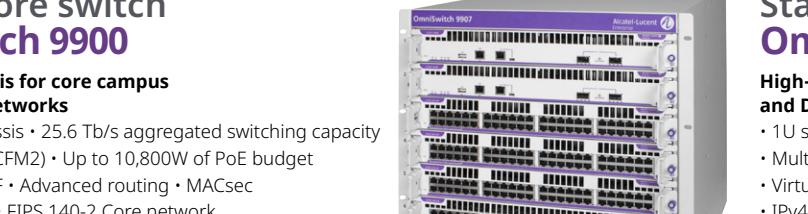


[Click for more details](#)

Stackable core switch OmniSwitch 6900

High-performance switch for core campus and Data Center networks

- 1U switches
- Multiple fixed configurations of 1/10/25/40/100G ports
- Virtual chassis • Advanced routing • VRF • Multicast
- IPv4/v6 • JTIC • ISSU • SPB • UNP
- Programmability: SDN, OVSDB, OpenStack, Python, Rest API, SSH
- FIPS 140-2 • EAL-2/NDCPP • MACsec

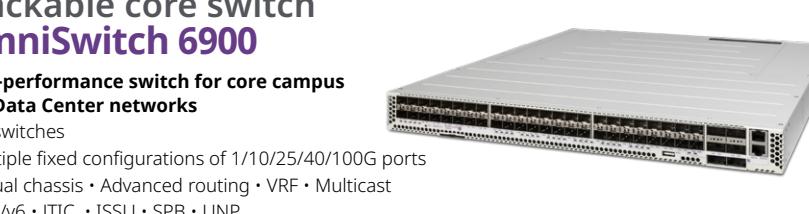

[Click for more details](#)

SMB and Websmart access OmniSwitch 2260/2360

Cost Effective 8/24/48 ports stackable, websmart Gigabit Ethernet Switch

- Virtual chassis • Standalone
- PoE+ and non-PoE models
- Static IPv4/v6 routing • UNP • Fiber SFP Ports
- Fanless (10/24 ports)
- Perpetual/Fast PoE • 802.1X/MAC Auth
- Advanced QoS and ACLs
- 10G SFP+ uplinks on "X" models




[Click for more details](#)

Alcatel-Lucent OmniVista® Network Advisor

Network Advisor is an AI-powered IT companion that eases network teams' daily operations

- Detect network issues
- Simplify troubleshooting
- Accelerate security threat detection, reaction & mitigation
- Benchmark network performance
- Get alerts on possible provisioning errors and proposal on corrections
- Get a comprehensive picture of the health of the network




[Click for more details](#)

Alcatel-Lucent OmniVista® 2500 Network Management System

Unified management and network-wide visibility for your LAN and WLAN infrastructure. Includes a full set of tools for converged campus networks and datacenters

- Automated reporting
- Full HTML 5 web-based client
- Monitor and manage end-to-end LAN and WLAN infrastructures

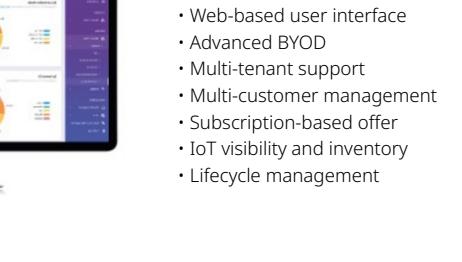

[Click for more details](#)

Alcatel-Lucent OmniVista® Cirrus Network Management

Cloud-based network management for LAN and WLAN

- Web-based user interface
- Advanced BYOD
- Multi-tenant support
- Multi-customer management
- Subscription-based offer
- IoT visibility and inventory
- Lifecycle management



[Click for more details](#)

OmniSwitch VMS Plugin for Milestone solutions

Boost operational efficiency and improve video surveillance infrastructure security.

- It allows users to create, modify, and delete ALE switches connected to cameras managed by the VMS
- Up to 70% of camera problems can be resolved remotely by the VMS operator
- Enhances the efficiency and responsiveness of the camera management system
- Enables you to view cameras connected to the switchboards and provide real-time status of the switches and ports
- Allows resetting of a camera and locking the MAC address to a port directly from the smart client




[Click for more details](#)

OmniAccess® Stellar Asset Tracking

It provides smart connection to assets, so you can locate equipment and people in real-time, optimizing operations and reducing costs.

- Real-time location & geofencing
- Asset tracking & asset management
- Automated & push button security alerts
- Contact tracing & contact history
- People location & people flow
- Equipment maintenance scheduling
- Workflow optimization
- API's for 3rd party integration



[Click for more details](#)

Network as a Service by Alcatel-Lucent Enterprise

It is a new way for businesses to purchase network infrastructure—hardware, licenses, applications, and management tools—with agile life cycle services through subscriptions. This is a modular offer to meet your business needs.

- Reduce time to benefit
- Quickly adapt to business needs
- Maximum agility and scalability
- Free up IT Staff with improved network operations
- Predictable costs for your network infrastructure
- All-inclusive Support Offer

Shortest Path Bridging (SPB)

Upgraded Ethernet network provisioning: SPB delivers traffic on the shortest path available, enabling virtualization and real-time apps.

It optimizes network performances and minimize downtime when adding, removing or replacing network devices — no matter the underlying physical architectural design, whether it is a virtual chassis, a pod, a mesh or a spine and leaf configuration.

- Dynamic network topology
- Less complex operations
- Create a multi-path fabric for traffic distribution
- Automatic configuration
- Plug-and-play capabilities
- Save time
- Optimize available bandwidth