

#### Intelligent Edge™ - Multi-Service Edge Router & SBC



High quality bandwidth is the lifeblood of business, especially as organizations move business applications to the cloud. Collaboration, streaming video, data storage, and data back-up services all require greater bandwidth to operate effectively.



Service providers and business customers need an Intelligent Edge device that cost effectively delivers, manages, protects, and monitors high-capacity broadband connections, offering superior performance and value.

Ribbon's Edge 8300 delivers superior value by offering a common platform that includes:

- · A high performance, full-featured, multi-tenant, data router with up to 10 Gbps of throughput
- · Market leading Session Border Controller (SBC) services to protect communications traffic
- · Analog line and station port, (FXO/FXS) and PRI port connectivity options
- High Availability (HA) option for SBC services and integration with Microsoft Teams Survivable Branch Appliance (SBA)
- · Multiple hardware choices for cost effective and highly resilient deployment requirements

Given that most business applications, including communications, are cloud based, data performance is more critical than ever. Yet, many mid-size businesses and multi-site enterprises struggle to find a routing platform that's robust enough to deliver their mission critical business applications and still cost effective to meet their budget. Too often organizations are forced to choose between consumer-grade solutions that are not robust or industrial-grade solutions that are over-priced.

Ribbon's Edge 8300 is different. It offers 2.5, 5, or 10 Gbps of routing throughput, with Session Border Control (SBC), gateway and high availability options, all in one intelligent edge device. It leverages Ribbon's proven SBC SWe Edge software to assure security. And, with more than a million edge elements deployed globally, Ribbon understands how to build and deliver reliable, secure solutions.

The Edge 8300 is also designed for what comes next. It includes VNF (Virtual Network Function) support to deliver uCPE-based services (centrally managed and strategically located at the edge of a customer's network) to run additional services. Service

### **Key Capabilities**

- Robust routing with data rates of up to 10 Gbps
- · Multihoming with BGP for resilient/diverse links
- · Large scale NAT support for multi-tenant use
- All physical interfaces (10 ports) can be provisioned as WAN or LAN (No fixed function for interfaces)
- SBC capacity of up to 900 concurrent calls optional HA









**Certified for Popular Cloud Solutions** 


Key Connectivity Choices for Edge 8300		
Maximum Data Throughput	10 Gb	
Maximum Concurrent Calls	900	
Maximum VLANs	100	
SFP+ Ports 10Gb (requires SFP+ transceivers)	2	
Ethernet Ports 10/100/1000	8	
FXO/FXS/PRI Port Maximums	2/24/4	
AC Power Options	Single or Dual	
DC Power Option	Dual	



## Telecom Connectivity - Analog and Digital Ports

Across the globe traditional PSTN services are being discontinued and/or prices are being increased on traditional analog or PRIbased services to encourage organizations to migrate to IP-based connectivity. While this makes sense strategically, it doesn't address the tens of millions of traditional devices (elevator phones, paging systems, alarm systems, door phones, etc.) that need to be maintained. Not to mention the need to replace traditional PBXs if they don't support SIP Trunks.

Ribbon's Edge 8300 offers an ideal solution. It offers up to four T1/E1 ports as well as options for up to 2 analog line ports (FXO) and up to 24 analog station ports (FXS). Multi-site organizations and service providers can use the Edge 8300 as "Swiss Army Knife", deploying it in a wide variety of settings to handle routing, telecom security and interoperability across both IP-based and legacy telecom devices. Organizations can configure different sites for different capacities and different connectivity requirements, while maintaining a consistent edge device across hundreds or thousands of locations. The Edge 8300 delivers outstanding value by incorporating multiple solutions in a single 1U chassis. It also reduces total cost of ownership by providing remote access to a common set of services and trouble shooting tools.

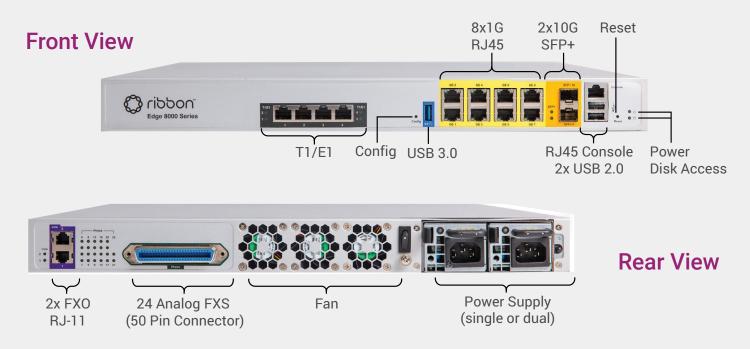


		Multiple Configuration Options
<b>*</b>	Routing	1Gb, 5Gb or 10 Gb router
	Session Border Control	Licensed in quantities of 5 sessions, up to 900
	T1/E1	4 PRI ports included
	FXO/FXS	2/22 or 0/24 ports
மு	Power	Single AC, dual AC or dual DC

# Multi-tenant Bandwidth Aggregation - Use case





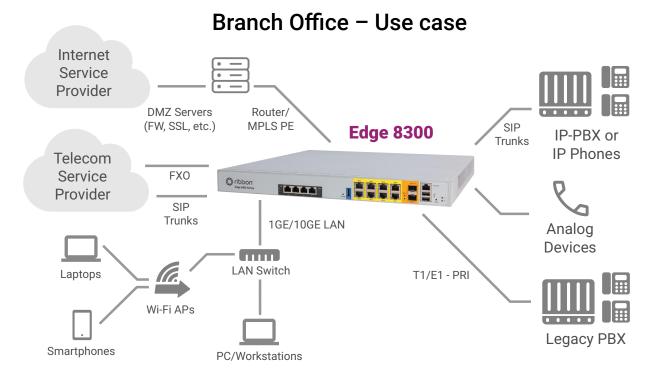



Maximum number of registered devices (SIP endpoints)  Maximum concurrent voice sessions (SIP sessions)  Telecom Ports  Maximum FXO Ports  Maximum FXO Ports  Up to 2, RJ-11  Maximum FXO Ports  Up to 24, 50 pin telco connector – 1000 ft maximum loop length, 5 REN  Maximum PXI Ports (T1/E1)  Ax RJ-48  Data Ports  Fiber 106  LAN/NIC  8x TGPps, RJ-45, support SR-IOV  Management Interfaces  USB  2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A  Security  Encryption and Authentication Encryption protocols supported  System Management  Local Device Management  Local Device Management  Local Device Management  Local Device Management  Remote upgrades, back-up, restore  FIF, HTTP/S  Firmware  Local firmware image for upgrade  Network Management  SNMP1-3  Message Analytics  System monitoring and SIP statistics  Debug tools  Packet capture (topdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H)  44mm (1.73', 1U)H x 445mm (17.5')W x 437.8mm (17.23')D  Weight  Mounting Options  Shelf, Rack Mountable  Operating Temperature  0 40 deg. Celsius with 3 variable speed fans  Operating Relative Humidity  4% to 90% (non-condensing)  Compliance  Rober Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply  Hardware Warranty  1 year	Features and Capabilities	Specifications
Maximum concurrent voice sessions   900	·	
Telecom Ports   Up to 2, RU-11	_	5000
Maximum FXO Ports       Up to 24, 50 pin telco connector – 1000 ft maximum loop length, 5 REN         Maximum PRI Ports (T1/E1)       4x RJ-48         Data Ports		900
Maximum FXS Ports       Up to 24, 50 pin telco connector – 1000 ft maximum loop length, 5 REN         Maximum PRI Ports (T1/E1)       4x RJ-48         Data Ports       Fiber 10G       2x SFP+ interface         LAN/NIC       8x 1Gbps, RJ-45, support SR-IOV         Management Interfaces       USB       2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A         Security       Encryption and Authentication       TLS, SRTP, HTTPS, SSH         Encryption protocols supported       3DES, AES, SHA-256, MD5         System Management       CLI (SSH) NETCONF         Remote upgrades, back-up, restore       FTP, HTTP/S         Firmware       Local firmware image for upgrade         Network Management       SNMPV1-3         Message Analytics       System monitoring and SIP statistics         Debug tools       Packet capture (tcpdump), traceroute, ping, syslog         Hardware Specifications       Dimensions (L x W x H)       44mm (1.73°, 1U)H x 445mm (17.5°)W x 437.8mm (17.23°)D         Weight       4.1 kg (9 lbs) - Single PSU         Mounting Options       Shelf, Rack Mountable         Operating Temperature       0-40 deg, Celsius with 3 variable speed fans         Operating Relative Humidity       4% to 90% (non-condensing)         Compliance       RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI <tr< th=""><th>Telecom Ports</th><th></th></tr<>	Telecom Ports	
Maximum PRI Ports (T1/E1) 4x RJ-48  Data Ports  Fiber 10G 2x SFP+ interface LANNIC 8x 16bps, RJ-45, support SR-IOV  Management Interfaces USB 2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A  Security  Encryption and Authentication TLS, SRTP, HTTPS, SSH Encryption protocols supported 3DES, AES, SHA-256, MD5  System Management Local Device Management CLI (SSH) NETCONF  Remote upgrades, back-up, restore FTP, HTTP/S  Firmware Local firmware image for upgrade Network Management SNMPv1-3  Message Analytics System monitoring and SIP statistics Debug tools Packet capture (topdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H) 44mm (1.73°, 10)H x 445mm (17.5°)W x 437.8mm (17.23°)D  Weight 4.1 kg (9 lbs) - Single PSU  Mounting Options Shelf, Rack Mountable  Operating Temperature 0-40 deg. Celsius with 3 variable speed fans  Operating Relative Humidity 4% to 90% (non-condensing)  Compliance RoHS 2.0, UL/CUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI  Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply  Hardware Warranty 1 year	Maximum FXO Ports	Up to 2, RJ-11
Data Ports   Fiber 10G	Maximum FXS Ports	Up to 24, 50 pin telco connector – 1000 ft maximum loop length, 5 REN
Fiber 10G LAN/NIC 8x 1Gbps, RJ-45, support SR-IOV  Management Interfaces USB 2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A  Security  Encryption and Authentication Encryption protocols supported 3DES, AES, SHA-256, MD5  System Management Local Device Management Local Device Management FTP, HTTP/S  FTP, HTTP/S  FTP, HTTP/S  FIRMATE Local firmware image for upgrade Network Management SNMPv1-3 Message Analytics System monitoring and SIP statistics Debug tools Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H)  Weight 4.1 kg (9 lbs) - Single PSU  Mounting Options Shelf, Rack Mountable Operating Temperature O-40 deg. Celsius with 3 variable speed fans Operating Relative Humidity 4% to 90% (non-condensing)  Compliance RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply Hardware Warranty 1 year	Maximum PRI Ports (T1/E1)	4x RJ-48
LAN/NIC  Management Interfaces  USB  2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A  Security  Encryption and Authentication Encryption protocols supported 3DES, AES, SHA-256, MD5  System Management Local Device Management Local Device Management FTP, HTTP/S  FTP, HTTP/S  FIRMWARE Local firmware image for upgrade Network Management Network Management Network Management SNMPv1-3 Message Analytics System monitoring and SIP statistics Debug tools Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications Dimensions (L x W x H) Weight 4.1 kg (9 lbs) - Single PSU  Mounting Options Shelf, Rack Mountable Operating Temperature O-40 deg. Celsius with 3 variable speed fans Operating Relative Humidity  Compliance RoHS 2.0, UL/CUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply Hardware Warranty 1 year	Data Ports	
Management Interfaces  USB 2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A  Security  Encryption and Authentication Encryption protocols supported 3DES, AES, SHA-256, MD5  System Management Local Device Management CLI (SSH) NETCONF  Remote upgrades, back-up, restore Firmware Local firmware image for upgrade Network Management SNMPV1-3 Message Analytics Debug tools Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications Dimensions (L x W x H) 44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")D  Weight 4.1 kg (9 lbs) - Single PSU  Mounting Options Shelf, Rack Mountable Operating Temperature O-40 deg. Celsius with 3 variable speed fans Operating Relative Humidity Compliance ROHS 2.0, UL/CUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply Hardware Warranty 1 year	Fiber 10G	2x SFP+ interface
USB 2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A  Security  Encryption and Authentication TLS, SRTP, HTTPS, SSH  Encryption protocols supported 3DES, AES, SHA-256, MD5  System Management  Local Device Management CLI (SSH) NETCONF  Remote upgrades, back-up, restore FTP, HTTP/S  Firmware Local firmware image for upgrade  Network Management SNMPv1-3  Message Analytics System monitoring and SIP statistics  Debug tools Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H) 44mm (1.73°, 1U)H x 445mm (17.5°)W x 437.8mm (17.23°)D  Weight 4.1 kg (9 lbs) - Single PSU  Mounting Options Shelf, Rack Mountable  Operating Temperature 0-40 deg. Celsius with 3 variable speed fans  Operating Relative Humidity 4% to 90% (non-condensing)  Compliance RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI  Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply  Hardware Warranty 1 year	LAN/NIC	8x 1Gbps, RJ-45, support SR-IOV
Encryption and Authentication   TLS, SRTP, HTTPS, SSH	Management Interfaces	
Encryption and Authentication Encryption protocols supported 3DES, AES, SHA-256, MD5  System Management Local Device Management CLI (SSH) NETCONF Remote upgrades, back-up, restore Firmware Local firmware image for upgrade Network Management SNMPv1-3 Message Analytics System monitoring and SIP statistics Debug tools Packet capture (tcpdump), traceroute, ping, syslog Hardware Specifications Dimensions (L x W x H) 4.1 kg (9 lbs) - Single PSU Mounting Options Shelf, Rack Mountable Operating Temperature O-40 deg. Celsius with 3 variable speed fans Operating Relative Humidity Compliance RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply Hardware Warranty 1 year	USB	2x USB 2.0 Front Type-A & 1x USB 3.0 Type-A
Encryption protocols supported  System Management  Local Device Management  CLI (SSH) NETCONF  Remote upgrades, back-up, restore  Firmware  Local firmware image for upgrade  Network Management  SNMPv1-3  Message Analytics  Debug tools  Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H)  Weight  4.1 kg (9 lbs) - Single PSU  Mounting Options  Shelf, Rack Mountable  Operating Temperature  O-40 deg. Celsius with 3 variable speed fans  Operating Relative Humidity  Compliance  RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI  Power  Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply  Hardware Warranty  1 year	Security	
System Management Local Device Management CLI (SSH) NETCONF Remote upgrades, back-up, restore FIFP, HTTP/S FIRMWARE Local firmware image for upgrade Network Management SNMPV1-3 Message Analytics System monitoring and SIP statistics Debug tools Packet capture (tcpdump), traceroute, ping, syslog Hardware Specifications Dimensions (L x W x H) 44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")D Weight 4.1 kg (9 lbs) - Single PSU Mounting Options Shelf, Rack Mountable Operating Temperature 0-40 deg. Celsius with 3 variable speed fans Operating Relative Humidity 4% to 90% (non-condensing) Compliance RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply Hardware Warranty 1 year	Encryption and Authentication	TLS, SRTP, HTTPS, SSH
Local Device ManagementCLI (SSH) NETCONFRemote upgrades, back-up, restoreFTP, HTTP/SFirmwareLocal firmware image for upgradeNetwork ManagementSNMPv1-3Message AnalyticsSystem monitoring and SIP statisticsDebug toolsPacket capture (tcpdump), traceroute, ping, syslogHardware SpecificationsPacket capture (tcpdump), traceroute, ping, syslogDimensions (L x W x H)44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")DWeight4.1 kg (9 lbs) - Single PSUMounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year		3DES, AES, SHA-256, MD5
Remote upgrades, back-up, restore  Firmware  Local firmware image for upgrade  Network Management  SNMPv1-3  Message Analytics  System monitoring and SIP statistics  Debug tools  Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H)  44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")D  Weight  4.1 kg (9 lbs) - Single PSU  Mounting Options  Shelf, Rack Mountable  Operating Temperature  0-40 deg. Celsius with 3 variable speed fans  Operating Relative Humidity  4% to 90% (non-condensing)  Compliance  RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI  Power  Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply  Hardware Warranty  1 year	System Management	
Firmware  Local firmware image for upgrade  Network Management  SNMPv1-3  Message Analytics  System monitoring and SIP statistics  Debug tools  Packet capture (tcpdump), traceroute, ping, syslog  Hardware Specifications  Dimensions (L x W x H)  44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")D  Weight  4.1 kg (9 lbs) - Single PSU  Mounting Options  Shelf, Rack Mountable  Operating Temperature  0-40 deg. Celsius with 3 variable speed fans  Operating Relative Humidity  4% to 90% (non-condensing)  Compliance  RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI  Power  Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply  Hardware Warranty  1 year	Local Device Management	CLI (SSH) NETCONF
Network ManagementSNMPv1-3Message AnalyticsSystem monitoring and SIP statisticsDebug toolsPacket capture (tcpdump), traceroute, ping, syslogHardware Specifications44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")DDimensions (L x W x H)44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")DWeight4.1 kg (9 lbs) - Single PSUMounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year		FTP, HTTP/S
Message AnalyticsSystem monitoring and SIP statisticsDebug toolsPacket capture (tcpdump), traceroute, ping, syslogHardware SpecificationsHardware SpecificationsDimensions (L x W x H)44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")DWeight4.1 kg (9 lbs) - Single PSUMounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Firmware	Local firmware image for upgrade
Debug toolsPacket capture (tcpdump), traceroute, ping, syslogHardware SpecificationsHardware SpecificationsDimensions (L x W x H)44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")DWeight4.1 kg (9 lbs) - Single PSUMounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Network Management	SNMPv1-3
Hardware Specifications  Dimensions (L x W x H)	Message Analytics	System monitoring and SIP statistics
Dimensions (L x W x H)44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")DWeight4.1 kg (9 lbs) - Single PSUMounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Debug tools	Packet capture (tcpdump), traceroute, ping, syslog
Weight4.1 kg (9 lbs) - Single PSUMounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Hardware Specifications	
Mounting OptionsShelf, Rack MountableOperating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Dimensions (L x W x H)	44mm (1.73", 1U)H x 445mm (17.5")W x 437.8mm (17.23")D
Operating Temperature0-40 deg. Celsius with 3 variable speed fansOperating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Weight	4.1 kg (9 lbs) - Single PSU
Operating Relative Humidity4% to 90% (non-condensing)ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Mounting Options	Shelf, Rack Mountable
ComplianceRoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCIPowerSingle PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power SupplyHardware Warranty1 year	Operating Temperature	0-40 deg. Celsius with 3 variable speed fans
Power Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply Hardware Warranty 1 year	Operating Relative Humidity	4% to 90% (non-condensing)
Hardware Warranty 1 year	Compliance	RoHS 2.0, UL/cUL, CB, FCC part 15, FCC part 68, IC, CE, RCM and VCCI
	Power	Single PSU 250W 110-240 VAC, 50-60 Hz. Optional dual 300W AC or 48V DC Power Supply
Certifications III FCC-15 FCC-68	Hardware Warranty	1 year
OL, 1 00 10, 1 00 00	Certifications	UL, FCC-15, FCC-68



Features and Capabilities	Specifications
Routing Services	
Network Throughput Options (bi- directional - offload throughput for UDP/TCP/GRE)	• 2.5G • 5G • 10G
Routing Protocol Support	BGP4, BGP4+, BGP RPKI, BGP L3VPN OSPFv2, OSPFv3 RIPv1, RIPv2, RIPng Static Routes Path Monitoring for Static Routes ECMP PBR MPLS BFD NHRP VXLAN EVPN
L2 and Encapsulation	<ul><li>VLAN (802.1Q QinQ)</li><li>VXLAN</li><li>LAG (802.3ad, LACP)</li><li>Ethernet Bridge</li></ul>
IP Networking	IPV6 Autoconfiguration     VRF     NAT     Multicast
Management & Monitoring Options	•SSHv2 •CLI •NETCONF/ YANG •REST •SNMP •Syslogs •802.1ab LLDP
Security	• ACLs
IP Services	• DHCP Server/ Client/ Relay • DNS Client/ Proxy • NTP
QoS Services	<ul> <li>Rate Limiting per Interface</li> <li>Rate Limiting per VRF</li> <li>Class-based QoS</li> <li>Classifications: ToS/ IP/ DSCP/ CoS</li> <li>Shaping and Policing</li> </ul>
	• Scheduling: PQ, PB-DWRR, HTB
Logging Options	Port batching     Syslog
ALG Support	•FTP •TFTP •PPTP
Additional Services	<ul><li>Endpoint-Independent Mapping and Filtering</li><li>Address and Port-Dependent Mapping and Filtering</li></ul>
Traffic Prioritization & QoS	Class-based QoS Classification: ToS / IP / DSCP / CoS Shaping and Policing Scheduling: PQ, PB-DWRR, HTB
DHCP	• Server/ Client/ Relay
VLANs	•802.1Q (up to 100)



Features and Capabilities	Specifications
SBC Services	
Security	TLS (Transaction Layer Security) for signaling encryption - TLS 1.2 (RFC 5246) Secure Real-time Transport Protocol (SRTP) & Control Protocol (SRTCP) for media and media control encryption (RFC 3711) Multiple unique X.509 public key certificates/PKCS #12 files (up to 11) Wildcard certificate support Topology hiding; user privacy Prevention of Denial-of-Service (DoS) and Distributed DoS (DDoS) attacks Traffic separation (VLAN interface separation) Malformed packet protection Access Control Lists (ACLs) IPsec VPN tunnel NAT/NAPT and port forwarding; NAT traversal
Protocol Support	•SIP (RFC 3261) over UDP, TCP, TLS •RTP/RTCP/RTCP-XR (RFC 3550, 3551, 3611) •RTP/RTCP multiplexing over single UDP port (RFC 5761) •IPv4, IPv6, and IPv4/IPv6 interworking •DHCP server & client (RFC 2131) •Network Address Translation – NAT (RFC 2663) •SNMPv2c, SNMPv3 •HTTPS
Media Services	G.711, G.722, G.722.2 (AMR-WB), G.723.1, G.726 (32 kbps), G.729A/B (8 kbps), T.38, SILK-NB/WB media encoding Video interworking Session Recording Protocol support - SIPREC (RFC 7866) DTMF support: RFC 4733, inband DTMF, SIP INFO (RFC 2833) Voice Activity Detection (VAD) G.168 Echo cancellation with standard 128 ms tail length Comfort noise generation and packet loss concealment Music on hold RTP inactivity monitoring (inactive call detection)
Quality of Service (QoS)	Bandwidth management Call Admission Control (CAC) to deny inappropriate calls P-time mediation for rate limiting Per-call statistics Diffserv/DSCP marking
Routing/Policy	<ul> <li>Interactive Connectivity Establishment (ICE), lite support (RFC 8445)</li> <li>Active Directory®/LDAP-based call routing</li> <li>Least cost, time of day and quality-based routing</li> <li>On-board call forking (up to eight end points)</li> <li>Supplementary services: call hold, call transfer (blind &amp; assisted) and call forward</li> <li>SIP routing based on source and destination IP address or Fully Qualified Domain Name (FQDN)</li> <li>ITSP E911 support; 911 call preemption</li> </ul>
Management Capabilities	<ul> <li>Single, secure, web-based GUI with real-time port monitoring</li> <li>Easy Configuration Wizard, for quick provisioning between SIP trunks, SIP phones, SIP PBXs (e.g. Avaya® Aura® or Cisco® Unified Communications Manager, Microsoft Direct Routing</li> <li>Centralized management from Ribbon Application Management Platform (RAMP)</li> <li>REST-based programmatic interface to remotely manage multiple SBCs</li> <li>SNMP v2c/v3 for comprehensive network management using third-party management systems</li> <li>Configuration backup and restore; upload from one site to another</li> <li>CDR reporting and local logging for troubleshooting</li> <li>Free Ribbon LX syslog server and log parser tool available</li> <li>Authentication: local user (username/password), Active Directory®, RADIUS</li> </ul>
Certified SBC for Microsoft Phone System & Direct Routing (Teams)	Supports integration with Teams Survivable Branch Appliance (SBA)     SILK-NB, SILK-WB codec support for improved Microsoft Teams user experience     Enhanced 911 (E911) and Emergency Location Identification Number (ELIN) Gateway Support     Media Bypass and Local Media Optimization support     Simplified migration from on-premises Skype for Business Server to Microsoft Teams     Support for multiple tenant-related Direct Routing deployments with Microsoft partners/PSTN carriers



Features and Capabilities	Specifications
SBC Services	
Site Survivability	<ul> <li>Supports high-avaialability deployment of SBC SWe Edge</li> <li>IP route redundancy to UC provider, in case of ISP or router failure</li> <li>PSTN fallback in case of WAN failure</li> <li>Built-in SIP registrar for site survivability for SIP clients including Yealink® Teams and Poly® UC phones and conference bridges</li> <li>Multiple Spanning Tree Protocol, to prevent routing loops</li> </ul>

Contact Us We are here to help. Contact us about our Edge solutions.

#### **About Ribbon**

Ribbon Communications (Nasdaq: RBBN) delivers communications software, IP and optical networking solutions to service providers, enterprises and critical infrastructure sectors globally. We engage deeply with our customers, helping them modernize their networks for improved competitive positioning and business outcomes in today's smart, always-on and data-hungry world. Our innovative, end-to-end solutions portfolio delivers unparalleled scale, performance, and agility, including core to edge software-centric solutions, cloud-native offers, leading-edge security and analytics tools, along with IP and optical networking solutions for 5G. We maintain a keen focus on our commitments to Environmental, Social and Governance (ESG) matters, offering an annual Sustainability Report to our stakeholders. To learn more about Ribbon, please visit rbbn.com.

Copyright © 2024, Ribbon Communications Operating Company, Inc. ("Ribbon"). All Rights Reserved. v0424

